


3.2 Technical data and options

MR Size 65




M.R. Bearing Company
Rolling & Sliding Solutions


MR S 65 Drawings

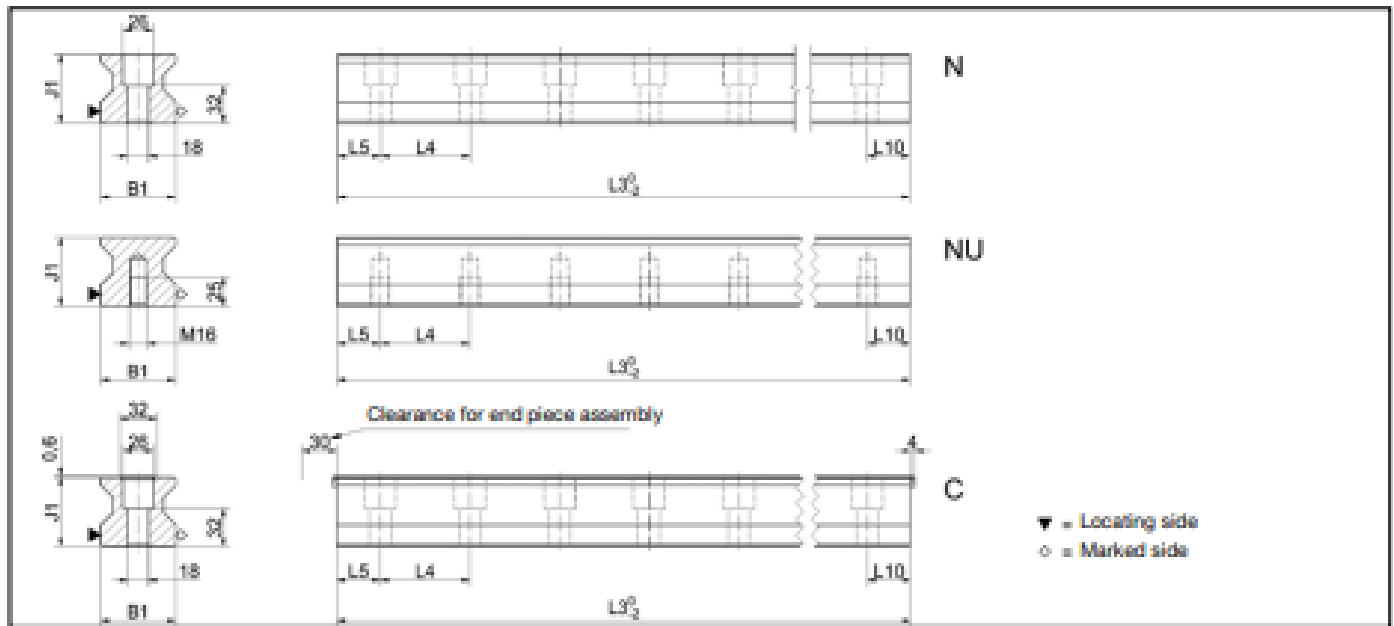


MR W 65 Drawings

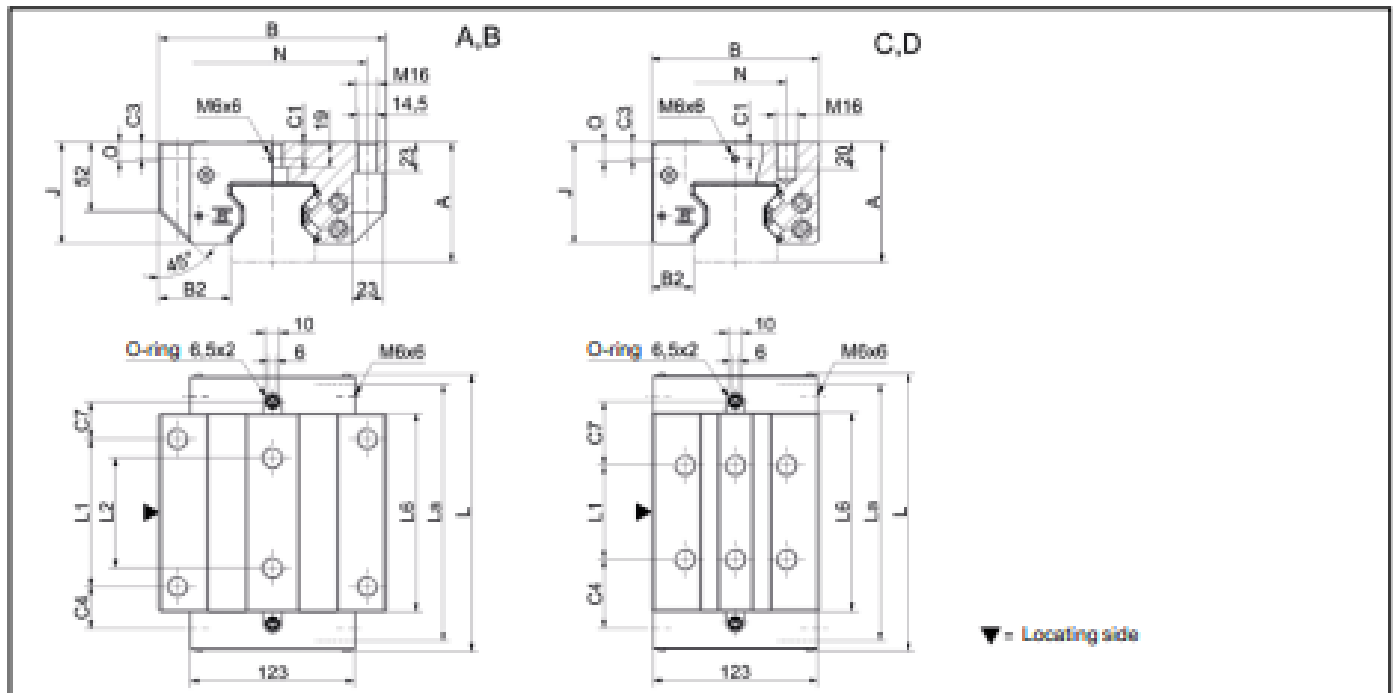

MR W 65 Rigidity diagram

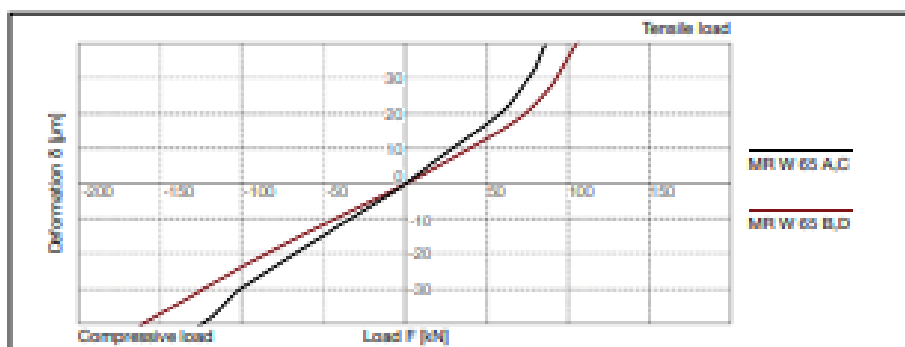

MR W 65 Load rating

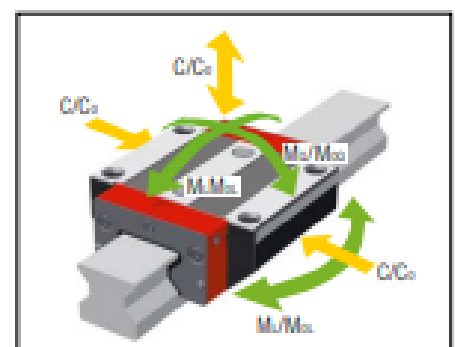


3.2 Technical data and options

MR Size 65



M.R. Bearing Company
Rolling & Sliding Solutions

MR S 65 Dimensions

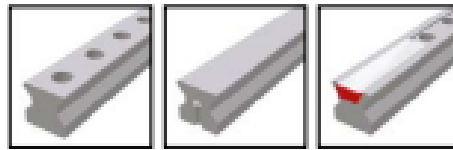

	MR S 65-N	MR S 65-NJ	MR S 65-C			
B1: Rail width	63	63	63			
J1: Rail height	58	58	58			
L3: Rail length max.	6000	6000	6000			
L4: Spacing of fixing holes	75	75	75			
L5/L10: Position of first/last fixing hole	36	36	36			
Gew.: Rail weight, specific (kg/m)	22.8	24.5	22.5			

Available options for MR S 65



MR W 65 Dimensions and capacities



	MR W 65-A	MR W 65-B	MR W 65-C	MR W 65-D		
A: System height	90	90	90	90		
B: Carriage width	170	170	126	126		
B2: Distance between locating faces	53.5	53.5	31.5	31.5		
C1: Position of center front lube hole	13	13	13	13		
C3: Position of lateral lube hole	13	13	13	13		
C4: Position of lateral lube hole	31.75	58	51.75	53		
C7: Position of top lube hole	27.75	54	47.75	49		
J: Carriage height	76	76	76	76		
L: Carriage length	207	260	207	260		
La: Cross wiper spacing*	201.5	254	201.5	254		
L1: Exterior fixing hole spacing	110	110	70	120		
L2: Interior fixing hole spacing	82	82	-	-		
L6: Steel body length	148.5	201	148.5	201		
R: Lateral fixing hole spacing	142	142	76	76		
O: Reference face height	15	15	15	15		
Capacities and weights						
CD: Static load capacity (N)	419000	530000	419000	530000		
C100: Dynamic load capacity (N)	232000	295000	232000	295000		
M00: Static cross moment capacity (Nm)	16446	20912	16446	20912		
M0L: Static longitud. moment capacity (Nm)	10754	17930	10754	17930		
M0: Dyn. cross moment capacity (Nm)	9154	11640	9154	11640		
M0L: Dyn. longitud. moment capacity (Nm)	5954	9380	5954	9380		
Gew.: Carriage weight (kg)	10.2	13.5	8.0	10.4		

Note: *Required to determine the rail length from the projected load distance

Available options for MR W 65

